


GENERAL INFORMATION

Recommended installation height	2m to 5m
CE mark	Yes
ROHS compliant	Yes
CCT	4000°K (Standard)
CRI	> 80+
Power	30.5 Watt
Luminaire Light Output	3.700 Lm
Efficacy	121 Lm/W
Testing standard	EN 60598-1 EN 60598-2-13 EN 62262 EN 60529 IEC TR 62778 LM 79-08
Warranty	5 Years

HOUSING AND FINISH

Housing	Aluminum Injection
Dimensions (mm)	Ø228 x 61 (8")
IP	IP 44 / IP54 (Optional)
Colour Options	 9005 9007 9016

ELECTRICAL INFORMATION

Input Voltage	185~265 VAC
PF (Power Factor)	> 95
Dimmable Options	1-10V, TRIAC, DALI
Electromagnetic compatibility (EMC)	EN 55015:2013/A1:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 61547:2009, EN 62493:2015
Emergency KIT	1H / 3H Available


FIELDS OF APPLICATION



Powered by Samsung LED
Philips LED Driver **SAMSUNG PHILIPS**

OPTICAL INFORMATION

LED	MidPower LED
Diffuser	Opal Diffuser
LED Lifetime	60.000 Hours
Beam Angles	110°
LED colour (optional)	2700°K-3000°K-4000°K- 5000°K-6500°K

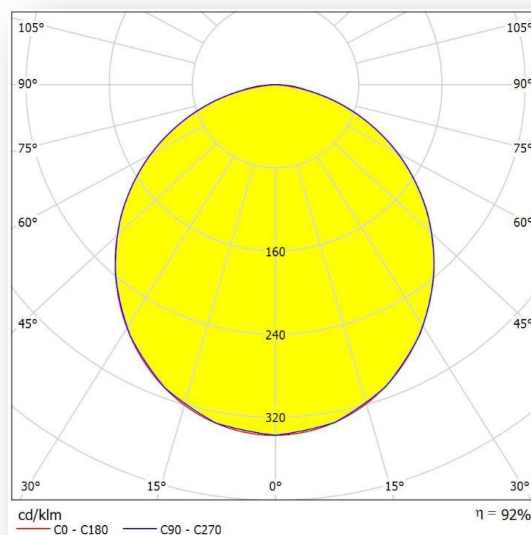

OTHER OPTIONS

Stock Code	Product Name	LED	LED Quantity	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)	Power (W)	Light Output (lm)	Efficacy (lm/W)	Dimensions (AxBxC) (mm)	Cutting Dimensions (D) (mm)
3" Downlight Series										
150.25.4446	3" OUTSIGHT DOWNLIGHT 3,5W 375LM	LM281BA+/S3	18	4000 °K	80+	3,5	375	107	94 x 72 x 47	Ø74
4" Downlight Series										
150.25.4447	4" OUTSIGHT DOWNLIGHT 4,7W 500LM	LM281BA+/S3	24	4000 °K	80+	4,7	500	106	120 x 98 x 48,5	Ø100
5" Downlight Series										
150.25.4448	5" OUTSIGHT DOWNLIGHT 8W 850LM	LM281BA+/S3	40	4000 °K	80+	8	850	106	147 x 119 x 56	Ø121
6" Downlight Series										
150.25.4449	6" OUTSIGHT DOWNLIGHT 11,5W 1280LM	LM281BA+/S3	70	4000 °K	80+	11,5	1280	111	177 x 148 x 58	Ø150
8" Downlight Series										
150.25.4450	8" OUTSIGHT DOWNLIGHT 16W 1800LM	LM281BA+/S3	98	4000 °K	80+	16	1800	113	228 x 197 x 61	Ø200

Stock Code	Product Name	LED	LED Quantity	Correlated Color Temperature (CCT)	Color Rendering Index (CRI)	Power (W)	Light Output (lm)	Efficacy (lm/W)	Dimensions (AxBxC) (mm)	Cutting Dimensions (D) (mm)
3" Downlight Series										
150.25.4451	3" OUTSIGHT DOWNLIGHT 4,5W 570LM	LM281B+/RJ	18	4000 °K	80+	4,5	570	127	94 x 72 x 47	Ø74
150.25.4452	3" OUTSIGHT DOWNLIGHT 6,5W 785LM	LM281B+/RJ	18	4000 °K	80+	6,5	785	121	94 x 72 x 47	Ø74
4" Downlight Series										
150.25.4453	4" OUTSIGHT DOWNLIGHT 6W 765LM	LM281B+/RJ	24	4000 °K	80+	6	765	128	120 x 98 x 48,5	Ø100
150.25.4454	4" OUTSIGHT DOWNLIGHT 9W 1050LM	LM281B+/RJ	24	4000 °K	80+	9	1050	117	120 x 98 x 48,5	Ø100
5" Downlight Series										
150.25.4455	5" OUTSIGHT DOWNLIGHT 12,5W 1500LM	LM281B+/RJ	40	4000 °K	80+	12,5	1500	120	147 x 119 x 56	Ø121
150.25.4456	5" OUTSIGHT DOWNLIGHT 18W 2070LM	LM281B+/RJ	40	4000 °K	80+	18	2070	115	147 x 119 x 56	Ø121
6" Downlight Series										
150.25.4457	6" OUTSIGHT DOWNLIGHT 22W 2650LM	LM281B+/RJ	70	4000 °K	80+	22	2650	120	177 x 148 x 58	Ø150
150.25.4458	6" OUTSIGHT DOWNLIGHT 27W 3175LM	LM281B+/RJ	70	4000 °K	80+	27	3175	118	177 x 148 x 58	Ø150
150.25.4459	6" OUTSIGHT DOWNLIGHT 32W 3690LM	LM281B+/RJ	70	4000 °K	80+	32	3690	115	177 x 148 x 58	Ø150
8" Downlight Series										
150.25.4460	8" OUTSIGHT DOWNLIGHT 30,5W 3700M	LM281B+/RJ	70	4000 °K	80+	30,5	3700	121	228 x 197 x 61	Ø200
150.25.4461	8" OUTSIGHT DOWNLIGHT 40W 4690LM	LM281B+/RJ	98	4000 °K	80+	40	4690	117	228 x 197 x 61	Ø200
150.25.4462	8" OUTSIGHT DOWNLIGHT 43,5W 5070LM	LM281B+/RJ	98	4000 °K	80+	43,5	5070	117	228 x 197 x 61	Ø200

DIMENSIONS

